



Stop Falls and Reduce Risk of Fall Injuries

Remove the hassle of buying components separately with one kit.



Fall Protection Kit

310 lb. Weight Cap. • Universal Size • Includes Five Point Full Body Harness, 6 ft. Detachable Shock Absorbing Lanyard with Internal Style Energy Absorber, Soft Sided Storage Bag, Protective Label Cover • Standards: ANSI Z359.1-2007, OSHA

19F395



53RG06

Fall Protection Kit

310 lb Weight Cap. • Universal Size • Includes Gear Bag, 6 ft. Lanyard, Harness • Standards: ANSI Z359.11-2014



45J298

Fall Protection Kit With Roofing Anchor

310 lb Weight Cap. • Universal Size • Includes Harness with back D-ring and Mating Buckle legs, 50' Vertical Lifeline, 3' Shock

Lanyard with Manual Rope Grab, Reusable Roof Anchor and 5 gal bucket • Standards: ANSI Z359.1-2007, OSHA 1926.502



35KU70

Fall Protection Kit

130 to 310 lb Weight Cap. • Universal Size • Includes FBH, 4½ to 6 ft Adjustable Restraint Lanyard, Gear Bag • Standards: ANSI Z359.1-2007, OSHA 1926.502



35KV11

Fall Protection Kit With Pass-Through Anchor

310 lb Weight Cap. • Universal Size • Includes FBH, Anchor, SRD with Gear Bag • Standards: ANSI Z359.1-2007, OSHA 1926.502



19F376

Polyester Full Body Harness

310 lb Weight Cap. • Universal Size



Duraflex Python® Ultra Polyester Full Body Harness

400 lb Weight Cap. • Includes Comfort Touch Back D-Ring Pad, Pull Free Lanyard Rings, Belt Loops

►CHOOSE: Size	Item No.
L/XL, 2XL	E1706



DuraLite Polyester Full Body Harness

400 lb Weight Cap. • L/XL Size

6AR84



Revolution® Polyester Full Body Harness

400 lb Weight Cap. • L/XL Size

5PA91





AirCore™ Polyester Full Body Harness

400 lb Weight Cap. • Includes Quick Connect Leg and Chest Straps, Integrated Shoulder Pads.

►CHOOSE:
Size

S/M, L/XL, 2XL/3XL

Item
No.

H3500



1D815



DuraLite Polyester Full Body Harness

400 lb Weight Cap. • L/XL Size



Titan II Polyester Full Body Harness

400 lb Weight Cap. • Includes Tongue Buckle Legs, Belt Loop

►CHOOSE:
Size

S/M, L/XL, 2XL

Item
No.

J5477



H500 Polyester Harness

420 lb. Weight Cap.
• Standards: OSHA 1926.502, ANSI Z359.11 and CSA Z259.10 Standards

►CHOOSE:
Size

S/M, Universal, 2XL

Item
No.

K2705



ExoFit™ X300 Polyester Harness

420 lb Weight Cap. • Features: Anti-Sliding Dorsal D-Ring Pad, Auto-Resetting Lanyard Keeper, Integrated Easy-Link SRL Adapter, Low-Profile Suspension Trauma Strap Design, Revolving Torso Adapter

►CHOOSE:
Size

XS, S, M, L, XL, 2XL, 3XL

Item
No.

K3387



Delta™ Polyester Full Body Harness

420 lb. Weight Cap.
• Universal Size • Standards: ANSI Z359.11-2014

2UZ7H



Polyester Full Body Harness

425 lb Weight Cap. • Universal Size

19F378



Polyester Full Body Harness

425 lb Weight Cap. • Includes Padded Waist Support, Tool Belt and Shoulder Pads

►CHOOSE:
Size

S/M, L/XL

Item
No.

H3933



Suspension Trauma Relief Strap

For Use with Most General Purpose Harnesses

2UZP7



Relief Step™ Suspension Trauma Relief Strap

For Use with Most General Purpose Harnesses • Color: Black/Orange • Standards: OSHA

5PB18





Stop a Free Fall within Inches

Design eliminates need for extended fall distance clearance.



2KUA6



TurboLite Self-Retracting Lifeline

400 lb. Weight Capacity • 6 ft. SRL Length • Vectron Core, Polyester Jacket Line Material • 1" Harness Hook Gate Opening • Standards: ANSI A10.32, ANSI Z359.14 Class A, ANSI Z359.14 Class B, CSA Z259.2.2-98, OSHA 1910.66, OSHA 1926.502



Scorpion Self-Retracting Lifeline

310 lb Weight Capacity • 9 ft. SRL Length • Vectran/Polyester Line Material • 3/4" Harness Hook Gate Opening • Standards: ANSI A10.32, ANSI Z359.14 Class A, ANSI Z359.14 Class B, CSA Z259.2.2-98, OSHA 1910.66, OSHA 1926.502



1XET5



Self-Retracting Lifeline

310 lb. Max. Working Load • 8 ft. SRL Length • Polyester Web Line Material • 3/4" Harness Hook Gate Opening • OSHA 1926.502

19F393



MiniLite Self-Retracting Lifeline

310 lb Weight Capacity • 11 ft. SRL Length • Polyester Line Material • 1" Harness Hook Gate Opening • Standards: ANSI A10.32, ANSI Z359.14 Class B, CSA Z259.2.2-98, OSHA 1910.66, OSHA 1926.502

1XET6



TurboLite Self-Retracting Lifeline

400 lb Weight Capacity • 6 ft. SRL Length • Vectron Core, Polyester Jacket Line Material • 1" Harness Hook Gate Opening • Standards: ANSI A10.32, ANSI Z359.14 Class A, ANSI Z359.14 Class B, CSA Z259.2.2-98, OSHA 1910.66, OSHA 1926.502

3RCC5



Protecta® Rebel™ Self-Retracting Lifeline

310 lb. Max. Working Load • 11 ft. SRL Length • Polyester Line Material • 3/4" Harness Hook Gate Opening • ANSI A10.32, ANSI Z359.1, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502

40MC86



Rebel™ Self-Retracting Lifeline

310 lb. Max. Working Load • 6 ft. SRL Length • Polyester Line Material • 3/4" Harness Hook Gate Opening • ANSI A10.32, ANSI Z359.14, OSHA 1910.66, OSHA 1926.502

40MC98



Self-Retracting Lifeline

310 lb. Max. Working Load • 6 ft. SRL Length • HPPE, Polyester Blend Web Line Material • 5/64" Harness Hook Gate Opening • ANSI Z359.14-2012, OSHA 1926.502

35KU97



Rebel™ Self-Retracting Lifeline

310 lb. Max. Working Load • 20 ft. SRL Length • Polyester Line Material • 3/4" Harness Hook Gate Opening • ANSI A10.32, ANSI Z359.14 Class B, OSHA 1910.66, OSHA 1926.502

40MC60



Self-Retracting Lifeline

310 lb. Max. Working Load • 10 ft. SRL Length • HPPE, Polyester Blend Web Line Material • 5/64" Harness Hook Gate Opening • ANSI Z359.14-2012, OSHA 1926.502

35KV07



22RT98



Self-Retracting Lifeline

310 lb. Max. Working Load • 20 ft. SRL Length • Galvanized Steel Line Material • 3/4" Harness Hook Gate Opening • ANSI Z359.14-2012, OSHA 1926.502



20A773



Integrated Rescue Self-Retracting Lifeline

310 lb Weight Capacity • 50 ft. L • Galvanized Steel Line Material • 3/4" Harness Hook Gate Opening • ANSI A10.32, ANSI Z359.14 Class B, CSA Z259.2.2-99, OSHA 1910.66, OSHA 1926.502 Standards

6ZLP1



Rebel™ Self-Retracting Lifeline

420 lb. Max. Working Load • 33 ft. SRL Length • Galvanized Steel Line Material • 3/4" Harness Hook Gate Opening • OSHA 1926.502



16V464



Self-Retracting Lifeline

420 lb. Max. Working Load • 6 ft. SRL Length • Nylon Line Material • 1 1/16" Harness Hook Gate Opening • ANSI Z359.14 Class A, ANSI Z359.14 Class B, OSHA 1926.502

2UZT7



Horizontal Lifeline

310 lb Weight Capacity • 60 ft L • Galvanized Steel Line Material • OSHA 1926.502 Standards



19F385



Shock-Absorbing Lanyard

310 lb. Weight Capacity • 4 1/2 to 6 ft. Working Length • Polyester • 3/4" Harness Hook Gate Opening • Snap Hook • For Use With Full Body Harness and Anchorage Device Mfr. No. G7007, G7015, G7016, G7017, G7008, G7010, G7336, G7372

19F384



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft. Working Length • Polyester • 3/4" Harness Hook Gate Opening • Rebar Hook • For Use With Full Body Harness and Anchorage Device Mfr. No. G7007, G7015, G7016, G7017, G7008, G7010, G7336, G7372



6ZLN6



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft Working Length • Polyester • 3/4" Harness Hook Gate Opening • (2) Rebar • For Use With Full Body Harness

19F382



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft. Working Length • Polyester • 3/4" Harness Hook Gate Opening • Snap Hook • For Use With Full Body Harness and Anchorage Device Mfr. No. G7007, G7015, G7016, G7017, G7008, G7010, G7336, G7372



45J282



Shock-Absorbing Lanyard

310 lb Weight Capacity • Polyester • 7/8" Harness Hook Gate Opening • Rebar Hook Hook • For Use With Full Body Harness




Limit Arresting Forces to Safe Levels

Inner core absorbs energy during a fall.



Shock-Absorbing Lanyard

310 lb. Weight Capacity • 6 ft. Working Length
• Polyester • 3/4" Harness Hook Gate Opening • Snap • For Use With Full Body Harness

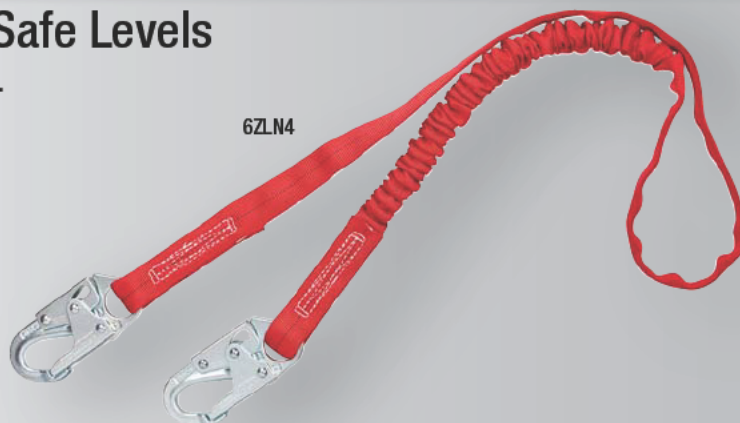

6ZLN4



19F383



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft. Working Length • Polyester • 3/4" Harness Hook Gate Opening • Rebar Hook • For Use With Full Body Harness and Anchorage Device Mfr. No. G7007, G7015, G7016, G7017, G7008, G7010, G7336, G7372




45JJ93



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft Working Length • Polyester • 3/4" Harness Hook Gate Opening • (1) Snap Hook • For Use With Full Body Harness

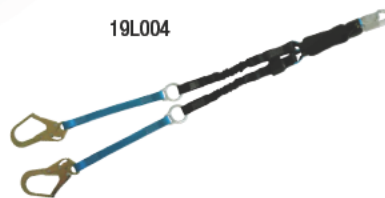

19L004

FALLSTOP® Shock-Absorbing Lanyard

310 lb Weight Capacity • 4 ft 6 in to 6 ft Working Length • Polyester • 2 1/4" Harness Hook Gate Opening • Rebar • For Use With Wind industry, Construction, Scaffold erectors, Maintenance



36WA06



Shock-Absorbing Lanyard

310 lb Weight Capacity • 4 ft to 6 ft Working Length • Polyester • 3/4" Harness Hook Gate Opening • (1) Snap Hook • For Use With Full Body Harness



6ZLN2



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft Working Length • Polyester • 3/4" Harness Hook Gate Opening • (2) Rebar • For Use With Full Body Harness




4YF78



Shock-Absorbing Lanyard

310 lb Weight Capacity • 6 ft Working Length • Polyester • 3/4" Harness Hook Gate Opening • (2) 5K Snap • For Use With Full Body Harness

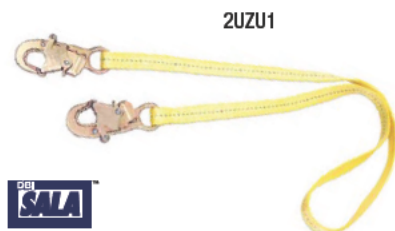

2UZU1



Fixed Length Positioning Lanyard

310 lb Weight Capacity • 6 ft Working Length • Polyester Webbing • 3/4" Harness Hook Gate Opening • Snap Hook Hook • For Use With Harness, Anchor



45J293



Positioning Lanyard

425 lb. Weight Capacity • 6 ft. L • Polyester Webbing • 3/4" Harness Hook Gate Opening • Snap Hooks • For Use With Full Body Harness or Restraint Belt




35KU75



Positioning Lanyard

425 lb Weight Capacity • 6 ft L • Polyester Webbing • 7/8" Harness Hook Gate Opening • Alloy Steel Double Locking Rebar Hook Hooks • For Use With Full Body Harness

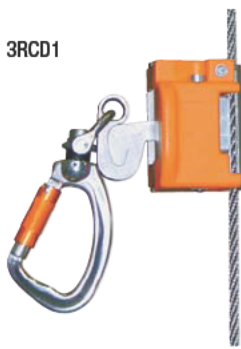

3RCD1



Cable Sleeve

310 lb Weight Capacity • 3,600 lb Tensile Strength



29EZ46



Cable Sleeve

310 lb Weight Capacity • For Use with Ladder Climbing Systems • Standards ANSI A14.3:2008, CE EN353-1, CSA Z259.2.5



2UZU2



General Purpose D-Ring Extender

310 lb Weight Capacity • 18 in L • 8800 lb. Tensile Strength



30HG85



Hinged Self Tracking Rope Grab

310 lb Weight Capacity • 5/8 in Rope Size • Shock-Absorbing Lanyard • ANSI Z359.1 Standards



48GR75



Carabiner

30 lb Tensile Strength • 2 in L • 7/8 in Gate Opening • Spring Loaded Lock Type • Aluminum

13D946



Carabiner

23 kN Tensile Strength • 4 in L • 7969/10000 in Gate Opening • No Lock Lock Type • Aluminum



4RC51



Carabiner

5,000 lb Tensile Strength • 4 5/8 in L • 1 in Gate Opening • Double-Action Twist Lock • Steel

16V854



Carabiner

5,000 lb Tensile Strength • 4 7/8 in L • 1 in Gate Opening • Double-Action Twist Lock • Zinc-Plated Steel

OSHA's Top 10 Violations

GRAINGER KnowHow®

Last year, OSHA recorded more than 7,000 violations of standard 1926.501, General Requirements for Fall Protection. Do you know what else made the agency's top ten list?

Get an overview of the most frequently cited standards in 2019 to help make sure your safety program is prepared at grainger.com/know-how/oshatop10.





1AG81



Honeywell
ABLUX

Cross Arm Strap

400 lb Weight Capacity
• 6 ft L • Polyester • 3 in Ring Dia. • Meets ANSI, CSA, OSHA Standards

19F391



Condor

Cross Arm Strap

425 lb Weight Capacity • 6 ft L
• Polyester • 2 1/4 in Ring Dia. • Meets ANSI, OSHA Standards

3AE99



Honeywell
ABLUX

Sliding Beam Anchor

400 lb Weight Capacity • 14 in L • Aluminum, Bronze • Meets OSHA, ANSI Standards

19F359



FALLTECH
Fall Protection, Preventing Injuries

Beam Clamp

425 lb Weight Capacity • 20 in L • Aluminum • 2 1/4 in Ring Dia. • Meets ANSI, OSHA Standards

32GW05



PS DOORS

Roof Hatch Safety Railing

43 in Top Rail Height • Fits Hatch 30 in to 48 in • Mild Steel Rail Material • Includes Self-Closing Gate, Mounting Hardware • Mounting Through Bolt Onto Roof Hatch • OSHA Standards



Guardrail System Base

10K030


Portable • 30 in L x 5 in H x 10 in W • For Use With 1.66 in OD Pipe, Guardrails, Collapsible Guardrail • Standards: OSHA and ANSI



493N09

Garlock Safety Systems Steel Roof Hatch Safety Railing

Clamp-On • Fits Hatch Length: 72 to 84 in L • 42 in H • Fits Hatch Width: 32 to 48 in W • Includes Self Closing Gate • Standards: OSHA 1926.501(b) (4)

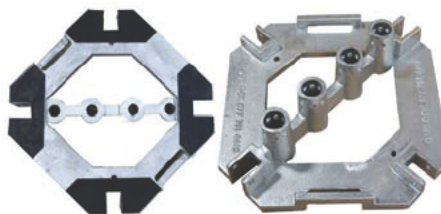

493M39

Garlock Safety Systems Steel Guardrail Base

Padded, Portable • 21 1/2 in L x 21 1/2 in W